


WPC215

21.5" PORTABLE DIRECTOR MONITOR

Sunlight Visible | Portable suitcase, ideal choice for outdoor filming



USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

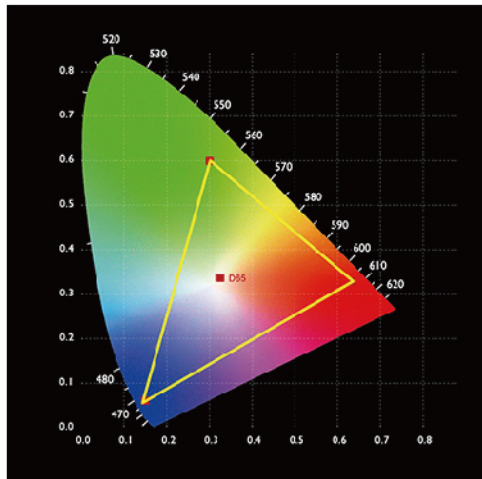

FEATURES

- 21.5-inch 1920x1080 full HD large screen
- Portable waterproof case, easily cope with various harsh shooting environments
- Intuitive buttons + new menu interface, more convenient to operate
- Custom 3D-LUT, preview film look
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- With multiple 1/4 screw thread, can be mount wireless transmission and other device.
- The bottom of case built-in metal bracket, can mount the monitor on the tripod
- Built-in speaker, stereo Earphone output

PROFESSIONAL TOOLS FOR ACCURATELY EXPOSURE AND FOCUS EVERY SHOT



3D LUT



Waveform



Vectorscope



Histogram



Peaking Filter



False Colors



Exposure



Overscan



Anamorphic Mode



Nine Grid



Pixel-to-Pixel



Embedded Audio




Image Freeze



Screen Marker



>> MULTIPLE POWER SUPPLY MODES


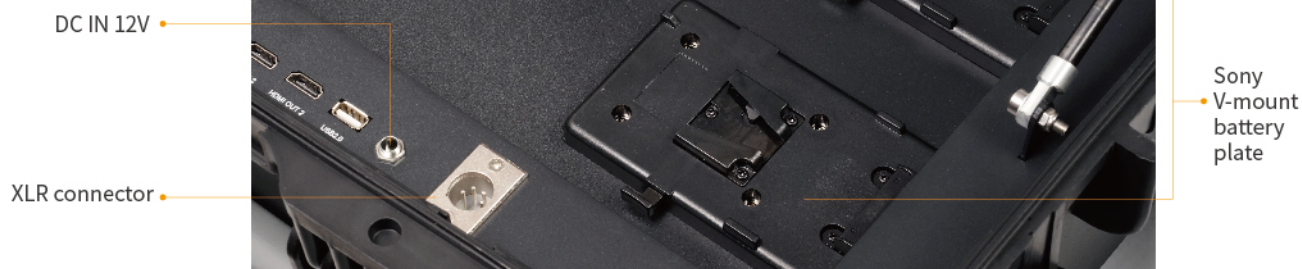


>> PARAMETER

Description	21.5" High Bright Carry-on Broadcast Monitor
Model	WPC215
Screen size	21.5" IPS
Resolution	1920×1080 pixels
Display Colors	16.7M colors 8bits
Gamut	72% NTSC
Pixel pitch	0.24795 (H) x 0.24795 (V) mm
Aspect Ratio	16:9
Brightness	1000 cd/m ²
Contrast	1000:1
Backlight	LED
Response Time	Tr + Tf=25ms
Viewing Angle	89°/89°(L/R) 89°/89°(U/D)
Inputs	HDMI*2, SDI*1, USB2.0*1
Outputs	HDMI*2, SDI*1,
Audio	3.5mm Stereo Headphone, Speaker
SDI Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
HDMI Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	4K UHD 3840×2160p (30/29.97/25/24/23.98 Hz)
	DCI 4K 4096×2160p (24Hz)
Power Consumption	≤32W
Input Voltage	DC 12~24V
Operating Temperature	-0°C~50°C
Storage Temperature	-20°C~60°C
Waterproof Level of Case	IP67
Material of Case	PP alloy
Unit Size	372L×262H×28.4D (mm)
Unit Weight	about 14.8kg



>> STRUCTURE

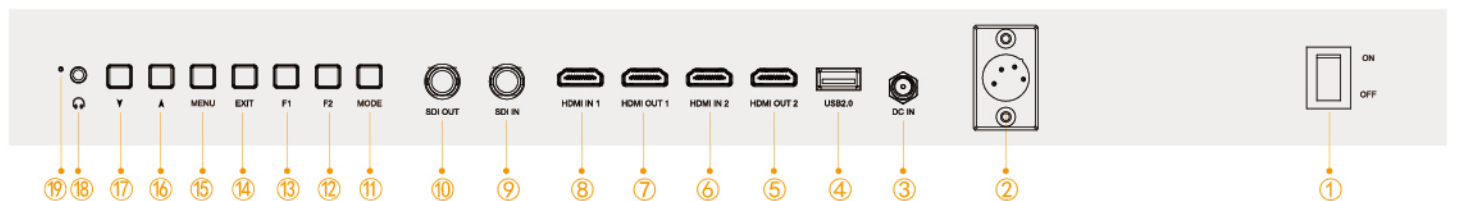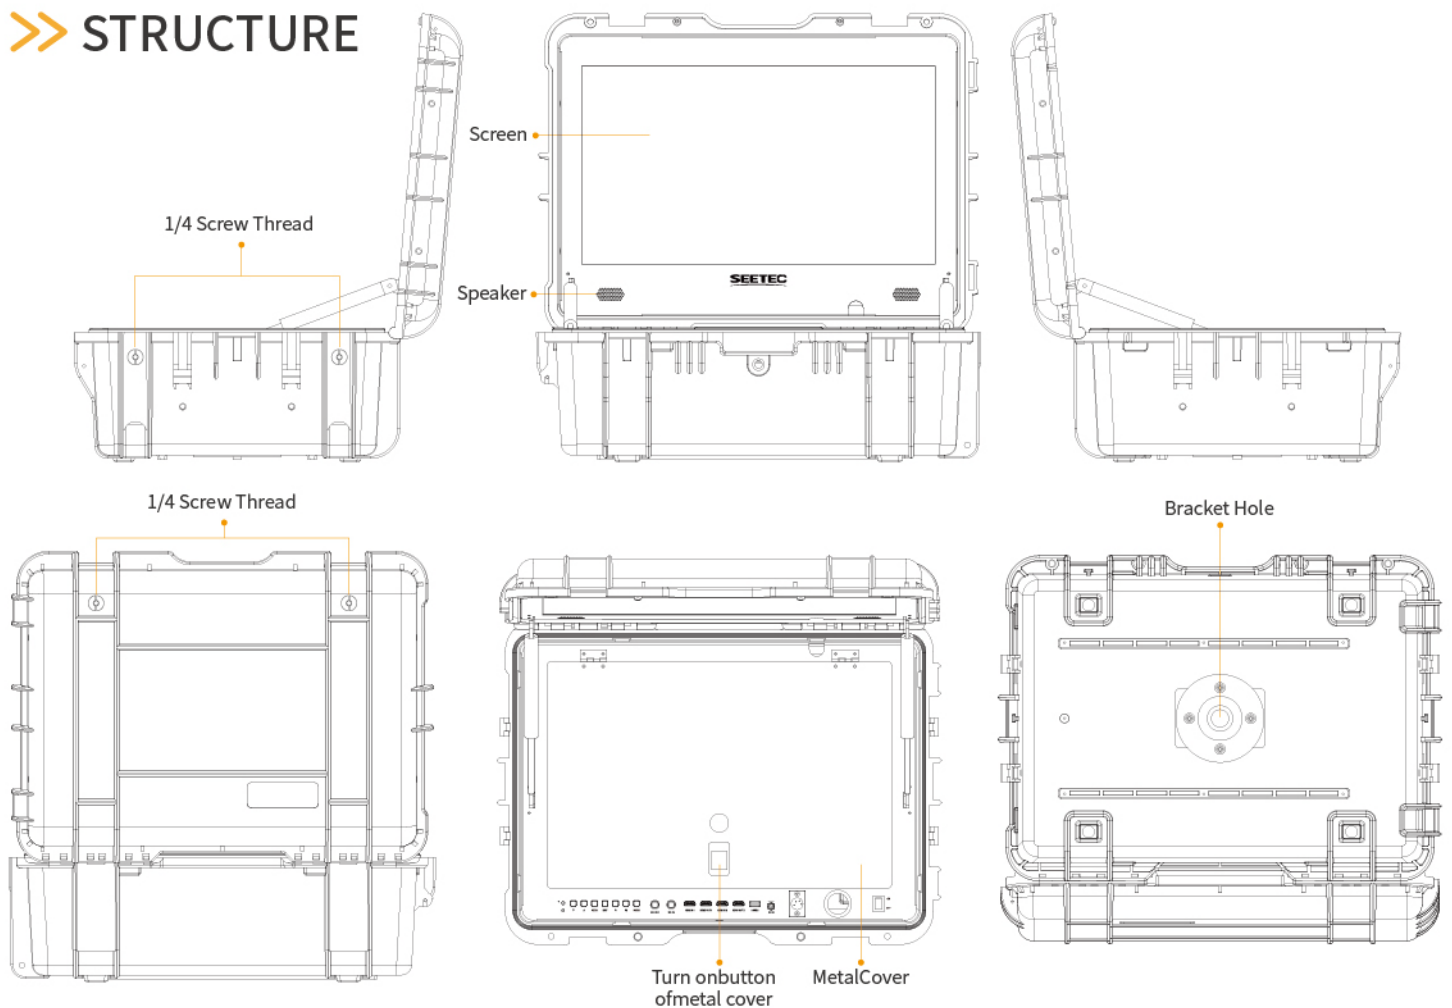

- ① Power Turn ON/OFF ② XLR power connector ③ DC power input ④ Firmware update/LUT file import interface ⑤ HDMI signal output 2
- ⑥ HDMI signal input 2 ⑦ HDMI signal output 1 ⑧ HDMI signal input 1 ⑨ SDI signal input ⑩ SDI signal output
- ⑪ Signal switching ⑫ Custom shortcut key ⑬ Custom shortcut key ⑭ Return/exit menu button ⑮ Main menu/confirm button
- ⑯ Selecting the upper level menu/increasing the parameter value ⑰ Selecting the next level menu/decreasing the parameter value
- ⑱ 3.5mm earphone jack ⑲ Power indicator

>> PACKING LIST

					
Monitor	4A Power Adapter	Mini HDMI Cable	SDI Cable	V-mount Battery Plate (default to mount on device)	User manual

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE FC



DRONE SHOP PERTH

P: 08 6278 1333

E: SALES@DRONESHOPPERTH.COM.AU

W: WWW.DRONESHOPPERTH.COM.AU

A: 7A GOONGARRIE ST BAYSWATER WA



DRONE SHOP PERTH

